


# Elliptical Series

## Nozzles, Tips, Diffusers

Issued March, 2008 • Index No. SPEC EL-1.0

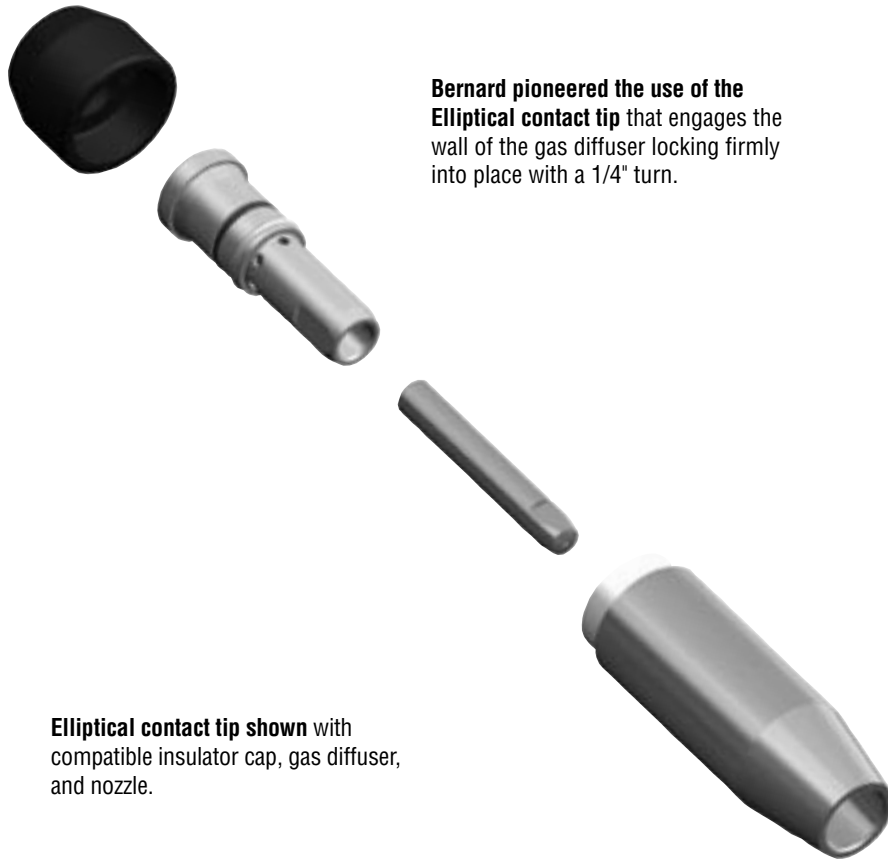

Bernard pioneered the use of the **Elliptical contact tip** that engages the wall of the gas diffuser locking firmly into place with a 1/4" turn.

Elliptical contact tip shown with compatible insulator cap, gas diffuser, and nozzle.

### All Consumables are Not Created Equal.

It's important to choose longer lasting consumables. They can make the difference between repeated consumable replacement and rework, or more arc time and better bottom line.

**No threads-** Elliptical shape quickly locks in place with a 1/4" turn for quick replacement.

**Elliptical tip design** provides adjustable tip to work distance and allows for fast and easy changeover.

**Elliptical tips have a much longer surface area for electrical and heat transfer** than fine threaded tips for extended tip life.

**Wide variety of standard slip-on nozzles** to fit any application

**Heavy-duty two-piece copper insulator nozzles** are ideal for high heat and mixed gas applications.

**Heavy-duty gas diffusers** for greater heat dissipation, allowing smooth gas flow and long life.

**Fit all Q-Guns™ and S-Guns™** - from 150 - 600 Amps.

Made with  
Pride and without  
Compromise in the **USA**


### Bernard®

An Illinois Tool Works Company  
449 West Corning Road, Box 667  
Beecher, Illinois 60401 USA

Phone: 800-946-2281 (US Only) 708-946-2281 (Outside US)  
Fax: 708-946-6726  
For more information, visit us at [BernardWelds.com](http://BernardWelds.com)



# Available Parts

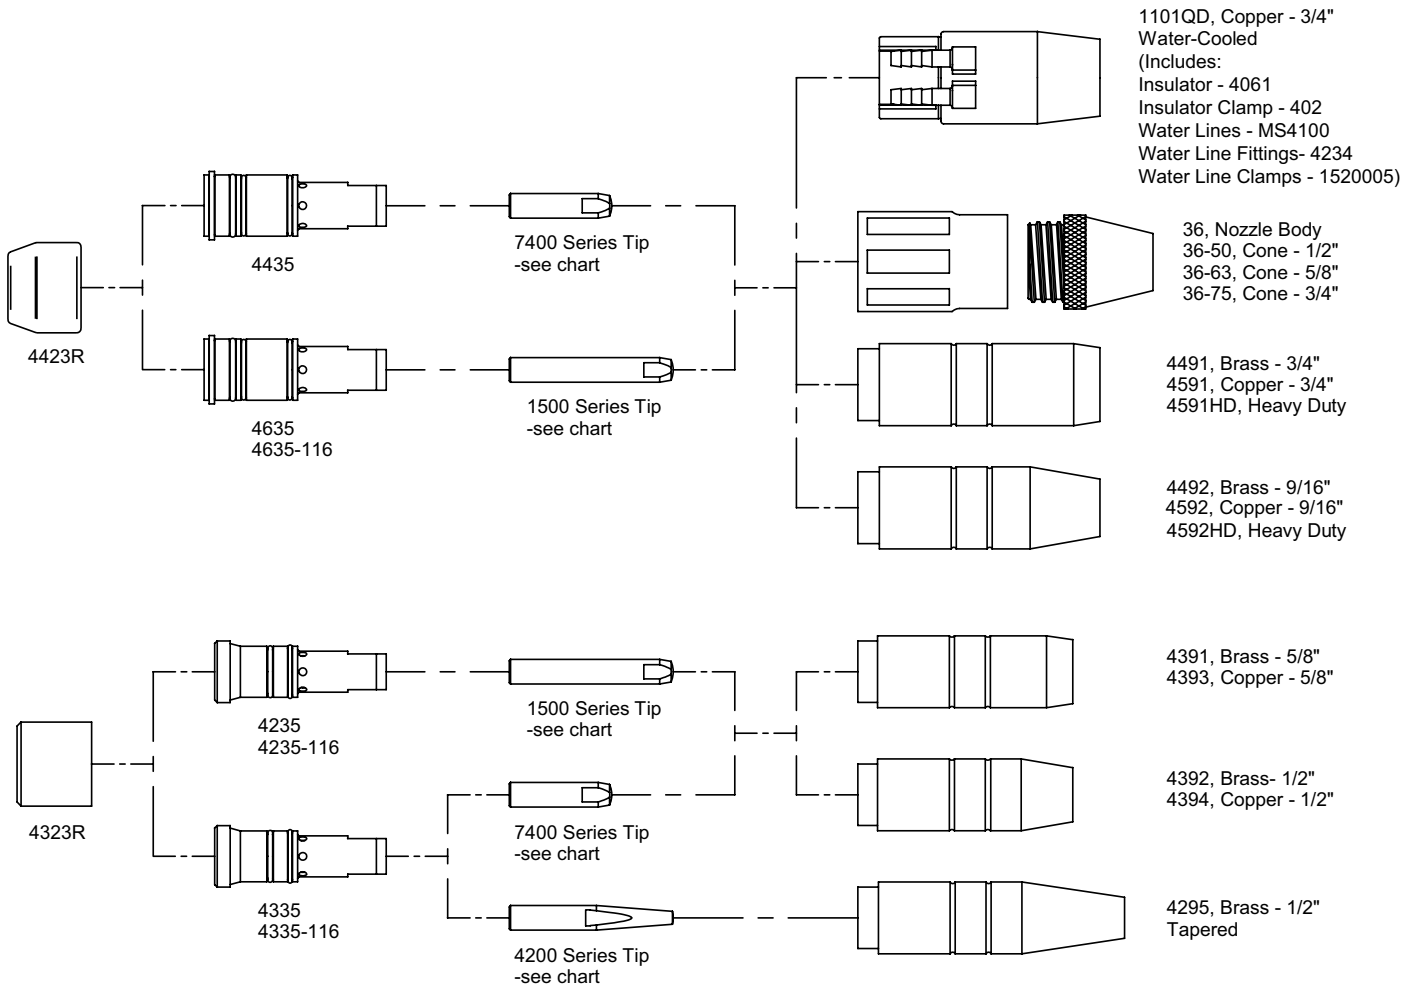

<b>1500 Series Tip</b>	
1597	.023" (.6 mm)
1588	.030" (.8 mm)
1589	.035" (.9 mm)
1596	.039" (1.0 mm)
1590	.045" (1.2 mm)
1598	.052" (1.4 mm)
1591	1/16" (1.6 mm)
1592	5/64" (2.0 mm)
1593	3/32" (2.4 mm)
1594	7/64" (2.8 mm)
1595	1/8" (3.2 mm)

<b>7400 Series Tip</b>	
7497	.023" (.6 mm)
7488	.030" (.8 mm)
7489	.035" (.9 mm)
7496	.039" (1.0 mm)
7490	.045" (1.2 mm)
7498	.052" (1.4 mm)
7491	1/16" (1.6 mm)
7492	5/64" (2.0 mm)
7493	3/32" (2.4 mm)
7494	7/64" (2.8 mm)
7495	1/8" (3.2 mm)

<b>4200 Series Tip</b>	
4281	.035" (.9 mm)
4299	.039" (1.0 mm)
4282	.045" (1.2 mm)
4283	.052" (1.4 mm)